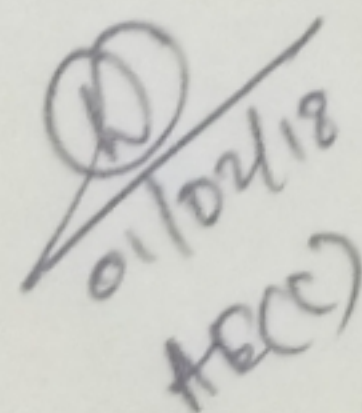


Schedule of Rate

Name of work: Collapsible fitting, fixing work at Dhaba Building NIT Silchar.
Time Limit = 7 Days

Sl. No.	Item Description	Unit	Quantity	Rate in fig	Rate in word	Amount
1	Providing and fixing in position collapsible M.S. shutters with vertical channels 20mmx10mmx2mm braced with flat iron diagonals 20mmx5mm size with top and bottom rails of T-iron 40mmx40mmx6mm with 38mm dia steel pulleys complete with bolts and nuts, locking arrangements, stoppers, handles including applying a priming coat of red lead paint.	Sqm	14.91			
2	Providing, fitting and fixing M.S. grill of required pattern for windows/ clerestory windows/ opening with M.S. flats at required spacing in frame all round, square or round M.S. bars with round headed bolts and nuts or screws. Fixed to Brickwork/P.C.C/R.C.C.	Kg	137.00			
3	Painting two coats (excluding priming coat) on new steel and other metal surface with enamel paint of approved brand and manufacture (Asian paint/ Berger paint/ ICI paint/ J & N paint/ Nerolac) to give an even shade including cleaning the surface of all dirt, dust and other foreign matter. General purpose (Asian paint/ Berger paint/ ICI paint/ J & N paint/ Nerolac).	Sqm	20.00			

Total=


01/02/18
AECC

Signature of the Agency